

**Site Documentation
K 70101 ASU No. 9 Košice**

Chapter 3.7.7.3 Air Vaporizer

Air Vaporizer W74101, W74201, W74301, W74401

- EC-Declaration of Conformity & Test Certificate
- CNLP 8x6x7000 Ambient Air Vaporizer
Drawing no. CN4307-2

W74101
201
301
401

CRYONORM

EC-DECLARATION OF CONFORMITY & TEST CERTIFICATE
PED 97/23/EC / EN10204-2.2

CUSTOMER:	Air Liquide AGS GmbH Füttingsweg 34 D-47793 Krefeld Germany	Serial nr. :	7772 up and incl. 7775
		Your order nr. :	4500023372
		Our order nr. :	R2-040241

DESCRIPTION	4-off Vaporiser CNLP 8x6x7000
DRAWING NR(S):	CN 4307-2
TEST PRESSURE:	44 Bar
DESIGN PRESSURE:	40 Bar
APPLICABLE STANDARDS:	AD Merkblätter
TEST MEDIUM:	Clean Air
DRYED AND CLEANED FOR LOX SERVICE ACC. TO I.6.1.03	
CRYONORM B.V. herewith declares that the above mentioned equipment is supplied in accordance with the specifications and order requirements and has been tested on leakage and was found tight.	
The used materials are in compliance with the design code and PED 97/23/EC requirements.	

Alphen a/d Rijn: dd.


Quality Control

15-12-04
CRYONORM
quality control
C.H.M. Elstgeest

We, CRYONORM, Koperweg 3, 2401LH Alphen a/d Rijn, hereby declare that in compliance with the above Directive, the product(s) detailed below have been manufactured in accordance with annex III, conformity assessment module B 'Type Examination' and module D 'Product Quality Assurance' as approved by Stoomwezen B.V. (Notified Body No. 0343), Weena Zuid 168, 3012 NC Rotterdam, under:
EC Type Examination Certificate PED/B/8028140 for type CNLP & CNFA, 8028134 for type PB and 8029239 for type CNHP and EC Certificate of Conformity Module D STW 302030636.



Alphen a/d Rijn: dd.

P.A.A.M. Tel
Director


15/12/04


GENERAL NOTES

NOM. CAPACITY : 1750 Nm³/hr.
MEDIA : O₂ - N₂ - Ar - CO₂.
WEIGHT : ±1800 KGS.
MAX. WORKING PRESSURE : 40 BAR.
TEST PRESSURE : 44 BAR.
TOLERANCE ON DIMENSIONS ±3MM.
CLEANED FOR OXYGEN USE.
FLANGE OUTSIDE DIAMETER AND BOLT/CIRCLE ACC. TO DIN 2635 PN40.

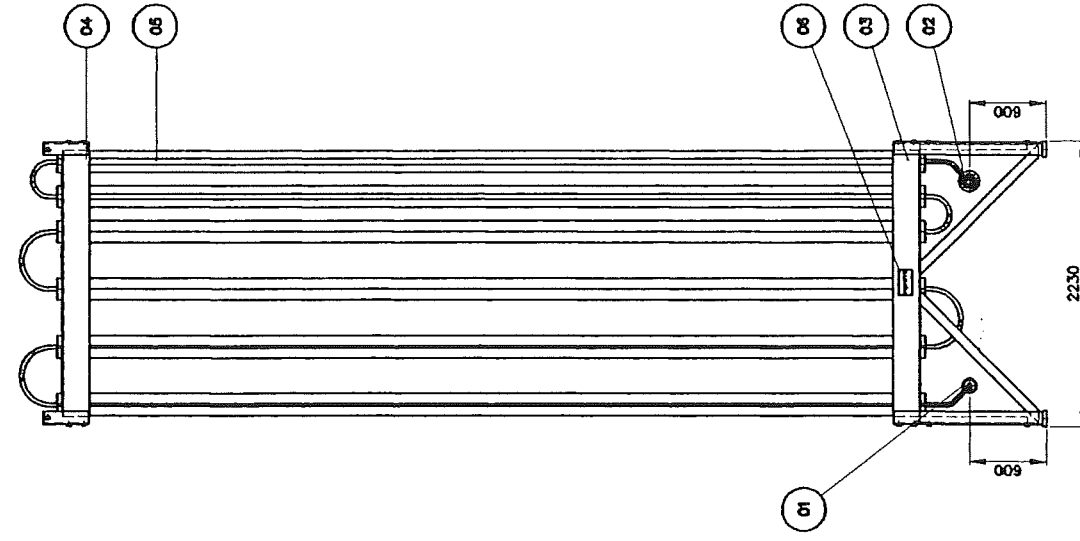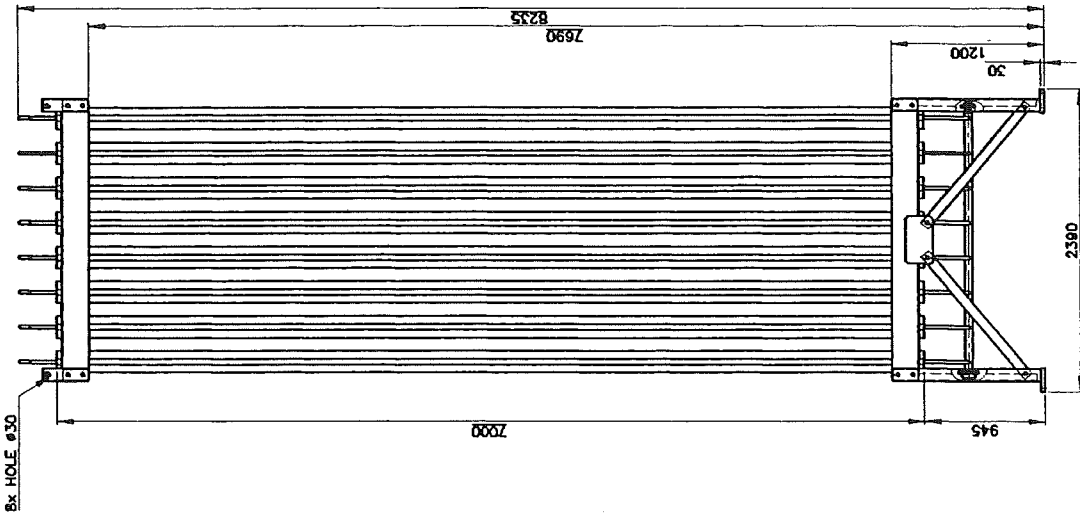

TOP VIEW

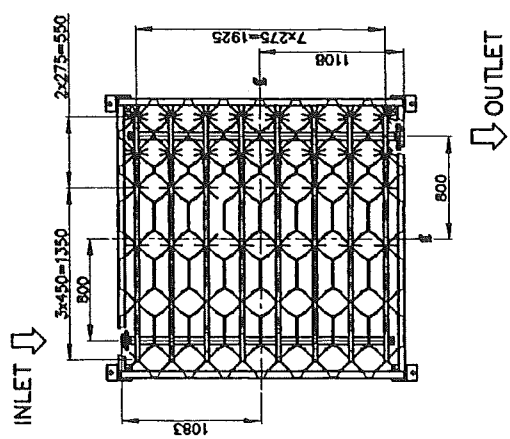

NO.	QTY.	NAME/DESCRIPTION	DRWG.	MATERIAL	REMARKS
06	1	NAMEPLATE			
05	1	VAPORISER BLOCK		CN4193-4 ALUMINIUM	
04	1	UPPER FRAME		CN4309-2 ALUMINIUM	
03	1	BASE FRAME		CN4099-1 ALUMINIUM	
02	1	OUTLET FLANGE WITH ITEM F		1583-A3 ALL / AISI	
01	1	INLET FLANGE WITH MATING FLANGE DN40		1583-A3 ALL / AISI	

REV.	DESCRIPTION	DATE
A	CHANGED	25-07-03
REV.	DESCRIPTION	DATE
		25-07-03

CNLP 8x6x7000
AMBIENT AIR VAPORISER

DATE: 10-07-02
DESIGNED BY: [Signature]
CHECKED BY: [Signature]
APPROVED BY: [Signature]

REPLACES: CN4307-2
REASON: [Signature]
DATE: 10-07-02

CRYOPHORM BV
L. 100 mm
100 mm
100 mm
100 mm

FOUNDATION

